

DVCD-MZ8: CD AUTOLOAD VOICE-ON-HOLD SYSTEM

We all know that Voice-On-Hold can reduce hang ups and give clients a captive audience for marketing. But, if equipment for this purpose is not reliable, flexible and easy to use, its effectiveness will be minimized. The DVCD-MZ8 addresses these issues.

Reliability

The slot loading CD mechanism is self contained with minimal moving parts. There is no tray or associated gears to fail. Also, this drive was designed for automobile applications so industrial installations are no problem. The steel chassis of the DVCD-MZ8 protects it from the elements of a traditional phone room. Proven encoding and playback circuitry is flawlessly serving tens of thousands of installations.

Flexibility

Line level and 8 ohm audio outputs, with level control, allow the DVCD-MZ8 to drive the widest range of phone systems. The exclusive mounting scheme means that the DVCD-MZ8 can be installed in any position.

Security

The DVCD-MZ8 accepts specially produced CD's, only available from Muzak Voice. This prevents staff from replacing the carefully crafted Muzak Voice production with their favorite music.




DVCD-MZ8 Features

- Slot loading CD mechanism
- Security prevents unauthorized loading
- All digital operation after initial message loading
- 8 minutes Non-volatile FLASH memory standard
- 6.8kHz fidelity
- Excellent noise floor and wide dynamic range
- Adjustable Line level and Amplified audio outputs
- Industrial grade all metal construction
- 3-Position flexible mounting scheme
- Backed by manufacturer warranty



866 MUZAK04 (866 689.2504)
voice.muzak.com

DVCD-MZ8: CD AUTOLOAD VOICE-ON-HOLD SYSTEM

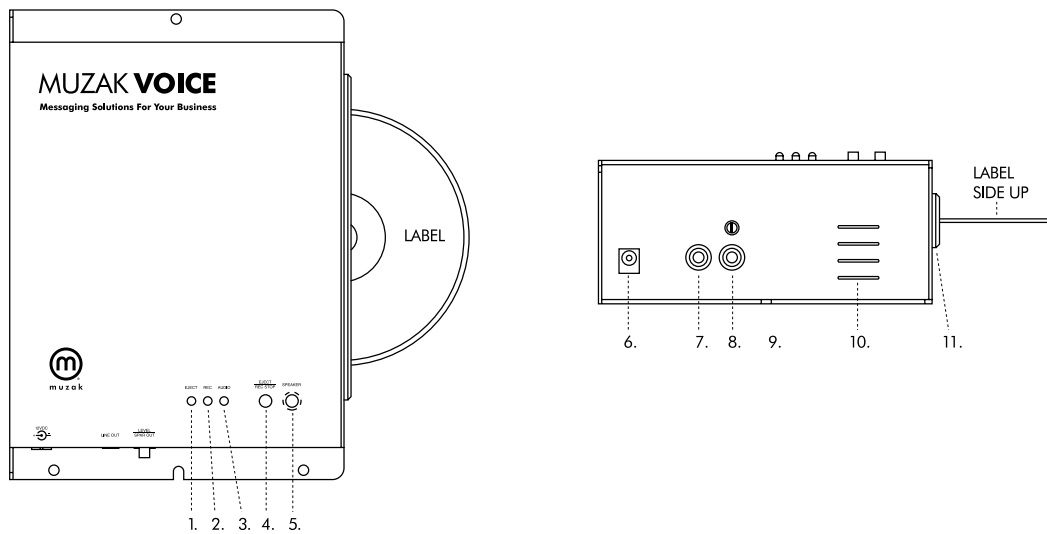

Specifications

Memory	Non-Volatile FLASH, 8 minutes standard (16 minutes optional)
Audio Fidelity	100Hz - 6.8kHz (PRO) 60dB signal to noise
Power	12VDC, power pack included
Audio Outputs	RCA Mono 600ohm, RCA Mono 2.5W @ 8ohm, Monitor Speaker
Manual Controls	Output Level, Eject, Speaker Enable
LED Indicators	CD Ejected, Recording, MOH Playing
Package	6.15" x 8.65" x 2.63" (wxdxh), 3 position wall mount, Painted steel chassis

- 1. Eject LED:** Yellow light ON indicates there is no CD inserted. Yellow light OFF indicates CD is in place.
- 2. Record LED:** Blinks one time when the power is on, indicating that the memory is operational. The Record LED will blink for up to 30 seconds while verifying a new audio program disc. This LED will light when the DVCD-MZD starts recording an audio program and will go out when the recording process stops.
- 3. Audio LED:** This green LED is ON when the system is playing a message from memory.
- 4. Eject / Record Stop Push Button:** This ejects the CD when the system is playing a message.
If pressed during the recording process the recording will be stopped.
- 5. Speaker Push Button:** Turns local monitor ON/OFF
- 6. Power:** Insert supplied power adapter.
- 7. Audio Output (line):** Auto output level of up to +4dB into 600ohm, this is standard level for most applications.
- 8. Audio Output (power):** Audio output level of up to 2.5W into 8ohm. Use this output if more drive is needed to reach a more comfortable listening level.
- 9. Audio Output Adjustment:** Adjusts the volume to the line level and power audio inputs.
- 10. Monitor Speaker:** Allows user to preview message recording and play back.
- 11. CD Entry:** Insert CD in slot with label side up.



866 MUZAK04 (866 689.2504)
voice.muzak.com